

PRODUCT CATALOG

HEALTH · BEAUTY · FITNESS

MDSAP
MEDICAL DEVICE SINGLE AUDIT PROGRAM

FDA 510(k)

CE 0598

FC

ISO
13485
BQAI20+
YEARS

Manufacturer:
Hong Qiangxing (ShenZhen) Electronics Limited

R&D Center:
Chongqing Rob Linka Technology Co.,LTD

OUR FACTORY




OUR PROFILE

Established in 2003, Hong Qiangxing(Shen Zhen)Electronics Limited, is specialized in developing and manufacturing medical and health-care products such as Nerve and muscle stimulators, TENS Unit for pain relief, EMS Muscle Stimulator for muscle training, Heating for period pain relief, Waist and Abdomen Massager, Foot Masssager, TDCS, Skincare Beauty Device, etc

To meet growing demand of customers and markets around the world, Domas adopts the latest technology and constantly launches patented medical and health-care products into the market. As a leading developer and manufacturer of home health products in China, we not only have an experienced R&D center with 30+ professional engineers, but also a strong production capability over 150,000 pcs each month.

OUR TIMELINE

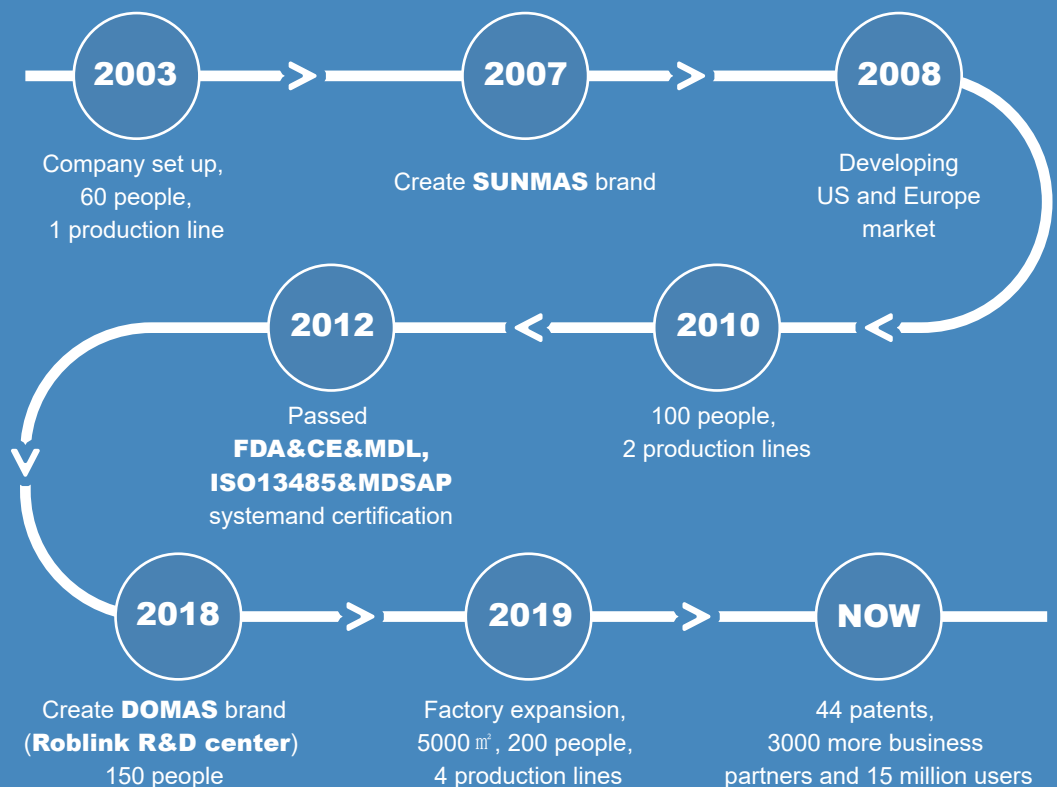

OUR CERTIFICATION

Over 22 years of efforts, our factory has a comprehensive production flow which has obtained over 60 protective patents, and the company quality management system has passed ISO13485, MDSAP, and its products have obtained certifications such as FDA 510K, Medical CE, MDL, FCC...

We'll keep innovating all around.



CONTENTS

01

WIRED TENS

Button Type TENS	06
Touchscreen TENS	08

03

WEAR EMS

Belt.....	14
Pants.....	14
Foot Pad.....	15

05

INTERMEDIATE FREQUENCY

Large Screen	17
Handheld.....	17

07

ELECTRODE PAD

Electrode Pad	22
---------------------	----

02

WIRELESS TENS

Regular TENS	11
Heated TENS	12

04

tDCS

Wired tDCS	16
Wireless tDCS	16

06

BEAUTY CARE

Beauty Care	19
-------------------	----

08

ACCESSORIES

Accessories	23
-------------------	----

WIRED TENS



SM9910



PARAMETER

Classical Design

MODE	24 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery

SM9126



PARAMETER

Amazon Best Seller

MODE	24 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery

SM9126C



PARAMETER

MODE	24 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 200mAh li-battery

SM587W



PARAMETER

MODE	24 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery

/// SM9070



PARAMETER ///

MODE	36 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery

/// SM9075



PARAMETER /// New Design

MODE	60 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery

/// SM9555



PARAMETER /// Multi-Channels

MODE	24 Mode 20 Intensity
CHANNEL	4
BATTERY	3.7V 320mAh li-battery

/// SM9196



PARAMETER ///

MODE	15 Mode 20 Intensity
CHANNEL	4
BATTERY	AAA grade battery(1.5V)

SM9067



PARAMETER

MODE	36 Mode 25 Intensity
CHANNEL	2
BATTERY	3.7V 360mAh li-battery

SM9069



PARAMETER Multi-Modes

MODE	32 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 500mAh li-battery

SM9009



PARAMETER

MODE	24 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery

SM9015



PARAMETER

MODE	24 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery

SM9079



PARAMETER

MODE	24 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery

SM9587



PARAMETER

MODE	24 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery

SM9603



PARAMETER

MODE	32/36 Mode 10/20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery

SM9033



PARAMETER

MODE	24 Mode 20 Intensity
CHANNEL	2
BATTERY	3.7V 180mAh li-battery



WIRELESS TENS



//// SM9116B



PARAMETER

Top Seller

MODE	6 Mode 20 Intensity
TIMER	Default working time 30mins
BATTERY	3.7V 180mAh li-battery


//// SM9116F



PARAMETER

MODE	6 Mode 20 Intensity
TIMER	Default working time 30mins
BATTERY	3.7V 180mAh li-battery

//// SM9116H

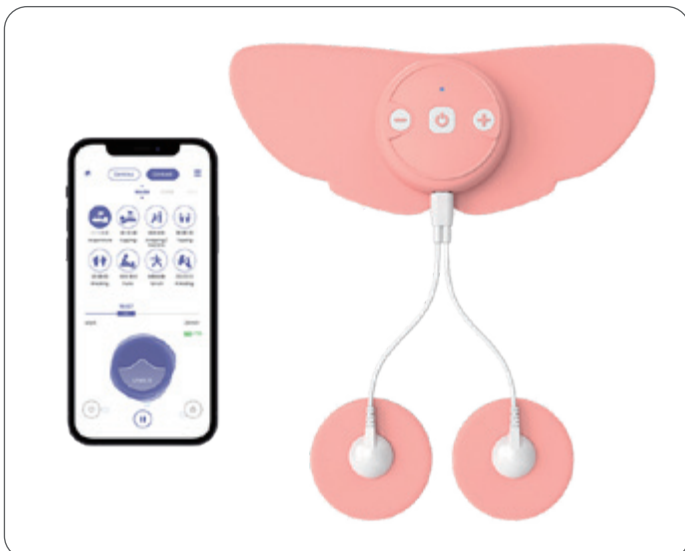

PARAMETER

MODE	26 Mode 25 Intensity
TIMER	0-60 Minutes Adjustable
BATTERY	3.7V 180mAh li-battery

//// SM9187



PARAMETER

MODE	24 Mode 20 Intensity
TIMER	1-60 Minutes Adjustable
BATTERY	3.7v 180mAh Li-battery

125A



PARAMETER

MODE	8 Mode 19 Intensity
TIMER	Default working time 20mins
BATTERY	3.7V 110mAh li-battery

125B



PARAMETER

MODE	6 Mode 19 Intensity
TIMER	Default working time 20mins
BATTERY	3.7V 110mAh li-battery

086



PARAMETER HEATED VERSION

MODE	6 Mode 20 Intensity
TIMER	Default working time 20mins
BATTERY	3.7V 1200mAh li-battery
HEATING TEMPERATURE	38~42 C

143



PARAMETER HEATED VERSION

MODE	8 Mode 20 Intensity
TIMER	Default working time 20mins
BATTERY	3.7V 1200mAh li-battery
HEATING TEMPERATURE	38~42 C

//// WEAR EMS



/// 084APP



PARAMETER ///

MODE	12 Mode 40 Intensity
TIMER	0-60minutes Adjustable
BATTERY	3.7V 180mAh li-battery

/// 037



PARAMETER ///

MODE	9 Mode 20 Intensity
TIMER	10minute Timer
BATTERY	3.7V 180mAh li-battery

/// 566



PARAMETER ///

MODE	12 Mode 40 Intensity
TIMER	10-60 Minutes Adjustable
BATTERY	3.7V 180mAh li-battery

/// 086



PARAMETER ///

MODE	12 Mode 40 Intensity
TIMER	1-60 Minutes Adjustable
BATTERY	3.7V 1200mAh li-battery

023B



PARAMETER

MODE	6 Mode 20 Intensity
TIMER	Default Working Time 30mins
BATTERY	3.7V 180mAh li-battery

091



PARAMETER

MODE	1 Mode 25 Intensity
TIMER	Default Working Time 30mins
BATTERY	3.7V 180mAh li-battery

125A



PARAMETER

MODE	8 Mode 19 Intensity
BATTERY	3.7V 110mAh li-battery

142



PARAMETER

MODE	8 Mode 19 Intensity
BATTERY	3.7V 150mAh li-battery

tDCS

/// 009H



PARAMETER

ELECTRIC CURRENT	2 mA 4 Intensity
BATTERY	3.7V 180mAh li-battery

/// 9128H



PARAMETER

ELECTRIC CURRENT	2 mA 4 Intensity
BATTERY	3.7V 320mAh li-battery

/// 157A



PARAMETER

MODE	1 Mode 1 Intensity
BATTERY	3.7V 180mAh li-battery

/// 157B



PARAMETER

MODE	1 Mode 1 Intensity
BATTERY	3.7V 180mAh li-battery

INTERMEDIATE FREQUENCY



/// 121

PARAMETER

New Mold Design

MODE	36 Mode 50 INTENSITY
CHANNEL	4/6/8
BATTERY	Power adapter for power supply
HEATING TEMPERATURE	3 heating level, 30°C/32°C/38°C

/// 152

Conceptual Design

PARAMETER

MODE	60 Mode 20 INTENSITY
CHANNEL	4/6/8
BATTERY	Power adapter for power supply
HEATING TEMPERATURE	3 heating level, 30°C/32°C/38°C



/// 113

PARAMETER

Handheld Intermediate

MODE	24 Mode 50 INTENSITY
CHANNEL	2
BATTERY	3.7V 5000mAh li-battery
HEATING TEMPERATURE	3 heating level, 30°C/32°C/38°C





BEAUTY CARE



SM9003A



PARAMETER

SUCTION PUMP AIR PRESSURE	3 Settings
HEATING TEMPERATURE	40~45 ℃/39~43 ℃
COOLING TEMPERATURE	12~16 ℃/12~18 ℃
BATTERY	3.7V,1200mAh Li-battery

SM9003B/C



PARAMETER

SUCTION PUMP AIR PRESSURE	3 Settings
HEATING TEMPERATURE	40~45 ℃/39~43 ℃
COOLING TEMPERATURE	12~16 ℃/12~18 ℃
BATTERY	3.7V,1200mAh Li-battery

SM9005A



PARAMETER

SUCTION PUMP AIR PRESSURE	3 Settings
FEATURE	EMS /LED/Blackhead Remover
BATTERY	3.7V,900mAh Li-battery

SM9005B/C



PARAMETER

SUCTION PUMP AIR PRESSURE	3 Settings
HEATING TEMPERATURE	40~44 ℃
BATTERY	3.7V,2200mAh Li-battery

/// SM9017



PARAMETER ///

USAGE	EMS&RF Anti-Aging
BATTERY	Rechargeable Lithium Battery

/// SM9018



PARAMETER ///

USAGE	EMS&RF&LED
BATTERY	Rechargeable Lithium Battery


/// RL-034



PARAMETER ///

USAGE	Microneedle
LEVELS	3 Levels
BATTERY	3.7V 500mAh Li-Battery

/// SM9603

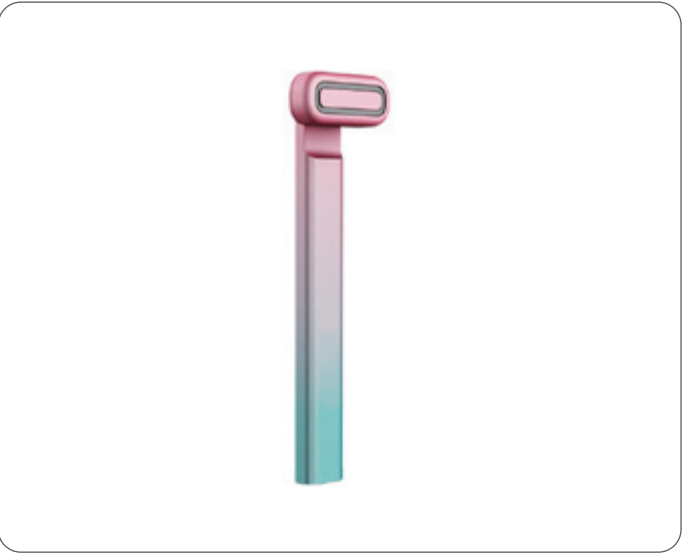

PARAMETER ///

USAGE	EMS Beauty Care
LEVELS	4 Levels
BATTERY	Rechargeable Lithium Battery

RL-061



PARAMETER

USAGE	Face Massager Tool
BATTERY	Lituium Battery

RL-028



PARAMETER


USAGE	EMS&RF&LED Body Device
BATTERY	3.7V, 1400mAh Li-Battery



ELECTRODE PAD



ACCESSORIES

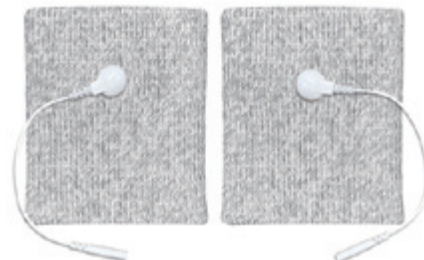



+86 173-2031-6645

domas09@lddomas.com

2F, Yongcheng Building, Xicheng Industrial Zone,
Xixiang Road, Bao'an District, Shenzhen, Guangdong, China

HEALTH · BEAUTY · FITNESS

